

Norfield



norfield.com


1-800-824-6242

350H HINGE MORTISING STATION


PROCESS DOOR AND HINGE JAMB IN ONE PASS

30 SECOND CHANGEOVER FOR VARIOUS DOOR HEIGHTS

PROCESSES DOORS & JAMBS UP TO 8'0"

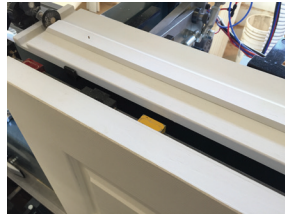

1 Process doors and jambs simultaneously with color coded blocks indicating right/left hinge locations.

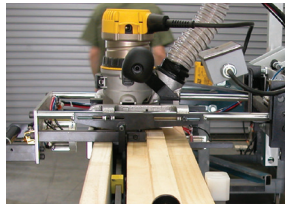

2 Mortise for flush hinges in either square or beveled door stiles.




3 Hinge router positioning is at an ideal working height for operator comfort and accuracy.




4 Optional butt router capable of machining larger exterior jambs and T-shaped mullions. When set up for exterior jambs the router will accommodate 1-1/8" to 2-1/4" center width with 1/2" wide stop thickness on both sides.

Option available:

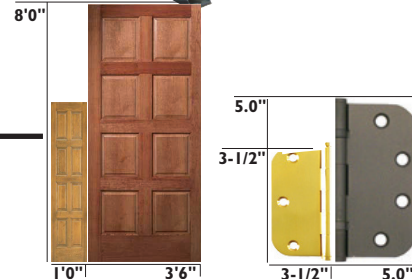

1-2
cycles/minute

process	product	specs	features	options
	<p>350H Hinge Mortising Station</p> <p>Process a variety of door & jamb widths and thicknesses</p> <p>30-second cycle time</p> <p>1/4" and 5/8" hinge corner radius routing capability</p>	<p>Door width 1'0" to 3'6"</p> <p>Door height up to 8'0"</p> <p>Door thickness 1-3/8" to 2-1/4"</p> <p>Hinge specs 3-1/2" to 5"</p> <p>Jamb width 2-1/2" to 10-1/2"</p> <p>Jamb length up to 8'0"</p> <p>Jamb thickness 1/2" to 1-1/2"</p> <p>Stop thickness 1/2" maximum</p> <p>Electrical 115V 60hz @ 20 Amps</p> <p>Pneumatic less than 1.0 CFM</p> <p>Floor Space req. (min.) 3' x 15'</p> <p>Approx. Shipping Wt. 600 lbs.</p> <p>Vacuum connection 4" duct</p>	<ul style="list-style-type: none"> • Pneumatic jamb clamps and jamb thickness adjustment • Single point dust collection port • Magnum-style hinge jamb routing • Quick-change index bar with integrated stop system for different hinge patterns • Quick-change for different hinge sizes • Includes 1 index bar 	<ul style="list-style-type: none"> • Dust collection system • Additional index bars • 2nd router carriage for quick corner radius changes, OR for processing mull posts • Hinge screw pilot hole predrill kit • Screwdriver kit • Scaled index bar