
Norfield 440s STOP STITCHER - 8830-800

Since 1959 1-800-824-6242

EFFICIENT AND SIMPLE
A COST-EFFECTIVE SOLUTION
FOR STOP STITCHING



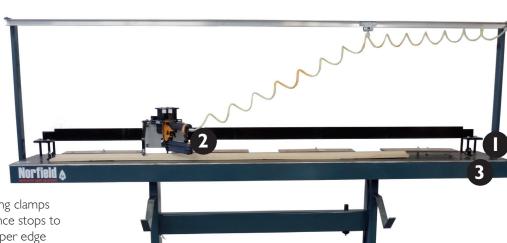


Non marring clamps and reference stops to ensure proper edge reveal while preserving material finish



Fully adjustable gun carriage and stop reference for easy material change-over



Adjustable left-hand and right-hand reference stops





Norfield door solutions

process	product	specs	features	options
	Manual Stop Stitcher -Cost-effective solution for low to mid-volume production - Process numerous lengths, widths, and thicknesses	Jamb width 3-1/2" to 10" Jamb length up to 100" Jamb thickness 3/8" to 1" Stop width I" to 2" Stop length up to 100" Stop thickness 1/4 to 3/8" Reveal choices 1-7/16" Pneumatic 2.8 CFM @ 90PSI Floor space req. (min) 2'-3"W x 9'6"L x 5'4"H Shipping Wt. 350lbs	 Foot pedal activated clamps to hold material in place Adjustable gun mount for left or right-handed operator Easily adjustable reference stops. 	No options at this time