

Norfield



norfield.com

1-800-824-6242

450 FLOW-THROUGH STOP STITCHER

INCREASE PREHUNG DOOR OUTPUT WITH
PRE-APPLIED STOP

ELIMINATE MANUAL STOP APPLICATION
BOTTLENECK


CONSISTENT FASTENER COUNT, LOCATION,
AND COUNTERSINK DEPTH




FAST: operator alternately feeds rights and lefts; powerfeed wheels convey stitched jambs through machine.

Throughput Rate


10-12
jambs/minute

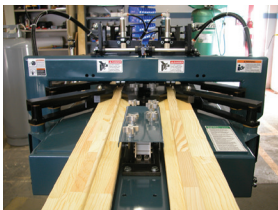


Accurate reveal: stop reveal is constant and precise despite jamb imperfections.

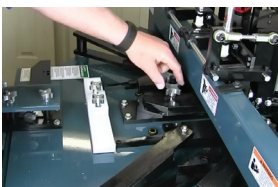

Quick change-overs: 1-minute conversion between reveals for 1-3/8" & 1-3/4" doors

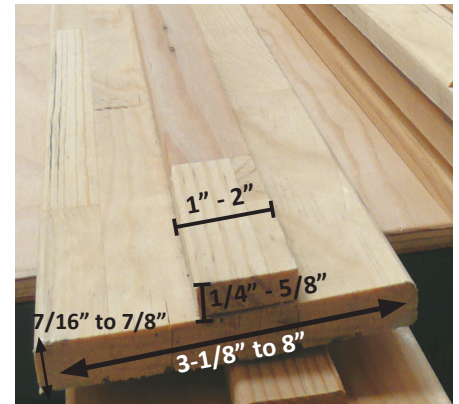

process	product	specs	features	options
	<p>450 Automatic Flow-through Stop Stitcher</p> <p>Automatic door stop-to-jamb fastening system</p>	<p>Jamb width 3-1/2" to 8" Jamb thickness 7/16" to 7/8" Jamb length infinite</p> <p>Stop width 1" to 2" Stop thickness 1/4" to 5/8"</p> <p>Reveal choices 1-1/2" 1-7/16" 1-13/16"</p> <p>Electrical 115V @ 60 Hz 5 Amps Pneumatic 6 CFM @ 120 psi Floor Space req. (min.) 9' x 20' Approx. Shipping Wt. 1100 lbs. Dim: 8'5"L x 3'3"W x 3'10"H</p>	<ul style="list-style-type: none"> • Foot pedal actuation for hands-free operation • Available with staplers or brad nailers • Process square cut or mitred stop • Process rabbeted or dadoed ("lugged") jambs • No adjustments for jamb length or width 	<ul style="list-style-type: none"> • Extended parts warranty